




PRODUCT NAME

QSSM(Brass) Double fixing cable waterproof connector

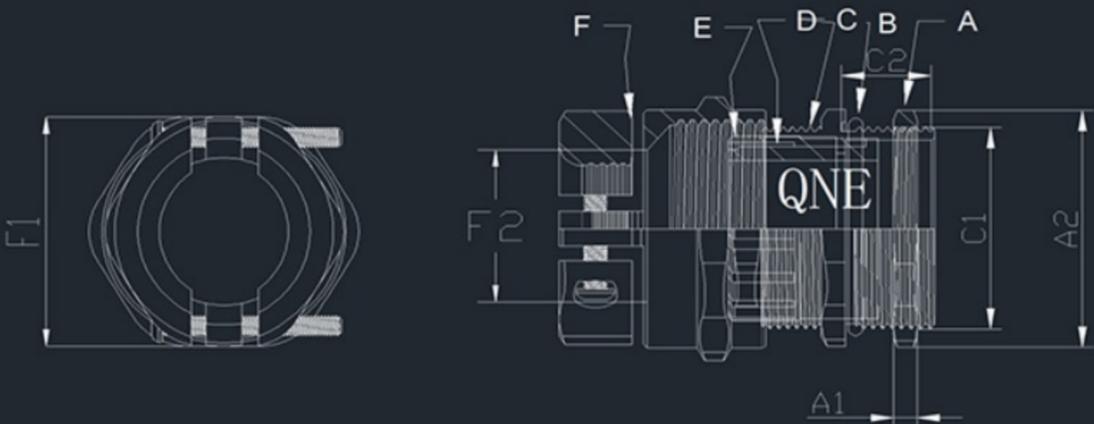

**Thread:** Metric, PG, G(PF/BSP/PS), and NPT thread

**Materials:** Brass with nickel plated for A. C. F parts. UL approved Halogen-Free Nylon PA66(Flammability UL 94V-2) for E parts. Weather-resistant EPDM rubber for B.D parts. (Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali, etc).

**Working temperature:** -40°C to 100°C in static state, or instantaneous heat resistance up to 120°C

**Product features:** double cable fastening for high tensile environments (car charging posts and others)

Protection degree: IP68

Item. No.	Thread	Cable Range ΦF2 (mm)	Thread O.D.C1 (mm)	Thread Length A2(mm)	Spanner Size F1&A2 (mm)
QSSM-M12-8-S8	M12×1.5	4.5–8	12	8	17/14
QSSM-M16S-8-S8	M16×1.5	4.5–8	16	8	17/18
QSSM-M16-10-S10	M16×1.5	6–10	16	8	20/18
QSSM-M18S-8-S8	M18×1.5	4.5–8	18	8	17/20
QSSM-M18-10-S10	M18×1.5	6–10	18	8	20/20
QSSM-M20M-10-S10	M20×1.5	6–10	20	8	17/22
QSSM-M20S-12-S12	M20×1.5	7–12	20	8	22/22
QSSM-M20-14-S14	M20×1.5	9–14	20	8	24/22
QSSM-M22S-12-S12	M22×1.5	7–12	22	8	22/24
QSSM-M22-14-S14	M22×1.5	9–14	22	8	24/24
QSSM-M24S-14-S14	M24×1.5	9–14	24	9	24/27
QSSM-M24-16-S16	M24×1.5	12–16	24	9	27/27
QSSM-M25M-14-S14	M25×1.5	9–14	25	9	24/27
QSSM-M25S-16-S16	M25×1.5	12–16	25	9	27/27
QSSM-M25-18-S	M25×1.5	14–18	25	9	30/27
QSSM-M27-18-S	M27×1.5	14–18	27	9	30/30
QSSM-M30-22-S22	M30×1.5	14–18	30	10	30/35
QSSM-M32S-18-S18	M32×1.5	14–18	32	10	30/35
QSSM-M32-22-S22	M32×1.5	18–22	32	10	35/35
QSSM-M32Z-25-S25	M32×1.5	20–25	32	10	40/35
QSSM-M36-25-S25	M36×1.5	18–22	36	10	40/40
QSSM-M40M-22-S22	M40×1.5	18–22	40	11	35/45
QSSM-M40S-25-S25	M40×1.5	21–25	40	11	40/45
QSSM-M40-30-S30	M40×1.5	24–30	40	11	45/45
QSSM-M50-33-S33	M50×1.5	25–33	50	13	50/55
QSSM-M50-38-S38	M50×1.5	32–38	50	13	57/55
QSSM-M60-44-S44	M60×1.5	37-44	60	14	64/68
QSSM-M63-44-S44	M63×1.5	37-44	63	14	64/68
QSSM-PG7-8-S8	PG7	4.5–8	12.5	8	17/14
QSSM-PG9-8-S8	PG9	4.5-8	15.2	8	17/18
QSSM-PG11-10-S10	PG11	6–10	18.6	8	20/22
QSSM-PG13.5-12-S12	PG13.5	7–12	20.4	8	22/24
QSSM-PG16-14-S14	PG16	9–14	22.5	8	24/25
QSSM-PG19-14-S14	PG19	9–14	24	9	24/27
QSSM-PG19-16-S16	PG19	12–16	24	9	24/27
QSSM-PG21-16-S16	PG21	12–16	28.3	9	27/30
QSSM-PG21-18-S18	PG21	14–18	28.3	9	27/30
QSSM-PG25-18-S18	PG25	14–18	30	10	30/35
QSSM-PG25-22-S22	PG25	18-22	30	10	30/35
QSSM-PG29-22-S22	PG29	16–22	37	10	35/40
QSSM-PG29-25-S25	PG29	18–25	37	10	40/40
QSSM-PG36-30-S30	PG36	24–30	47	11	45/50
QSSM-PG36-33-S33	PG36	25–33	47	11	50/50
QSSM-PG42-33-S33	PG42	25-33	54	13	50/57
QSSM-PG42-38-S38	PG42	32–38	54	13	57/57
QSSM-PG48-44-S44	PG48	37–44	59.3	14	64/64